
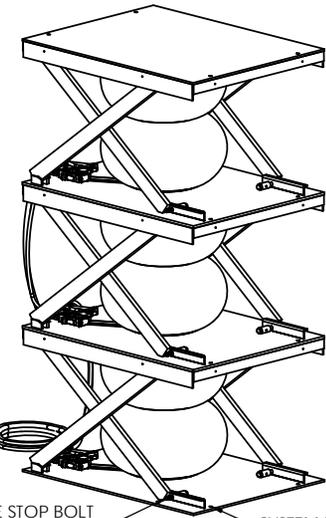
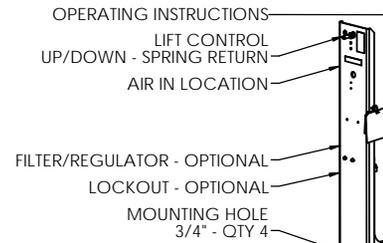
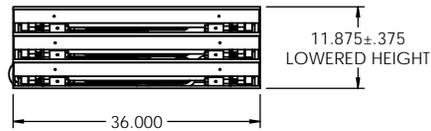
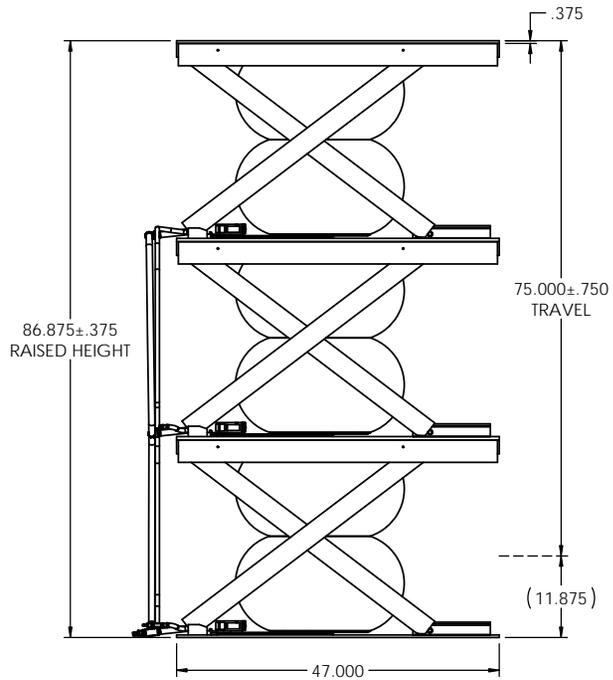


PART #: LSA09-XX-87-3647

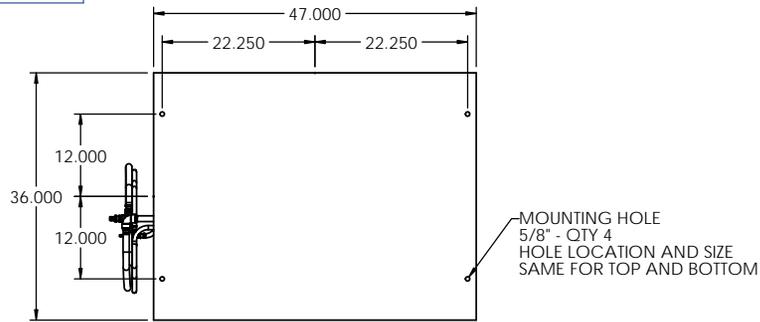

INTERNAL MAINTENANCE STOP BOLT  
PLATED: ZINC - QTY 6  
SYSTEM MUST BE ANCHORED  
INTERNAL MOUNTING HOLE  
5/8" - QTY 4

**SPECIFICATIONS - STANDARD**

- CAPACITY: 1,000 - 3,000 LBS  
ALL LOADS MUST BE EVENLY DISTRIBUTED  
LIFT MAY NOT RAISE TO FULL HEIGHT  
WITH MAXIMUM CAPACITY LOAD
- CONTROLLER: HAND  
CONTROLLER MOUNT: PEDESTAL  
INTERNAL VALVE: PILOTED EXHAUST  
AIR FEED LINE: 1" MINIMUM  
AIR PRESSURE: 70 - 100 PSI  
CONTROLLER HOSE: 12 FEET  
SKIRT: OPTIONAL  
(ADD 3-1/2 INCHES PER SIDE TO BASE  
OF LIFT DIMENSIONS FOR SKIRTING)
- COLOR: LIFT: HERKULES SAFETY ORANGE  
SCISSORS: HERKULES SAFETY ORANGE  
PEDESTAL: HERKULES SAFETY ORANGE
- SAFETY FEATURES: PRESSURE RELIEF VALVE - QTY 3  
CHECK VALVE - QTY 3  
INTERNAL MAINTENANCE STOP BOLT - QTY 6
- WEIGHT SHIPPED: 1,720 LBS (APPROXIMATE)

THE NEED FOR SAFETY DEVICES VARIES WITH EACH APPLICATION OF THIS PRODUCT THIS DRAWING MAY NOT INCLUDE ALL APPROPRIATE SAFETY DEVICES FOR YOUR APPLICATION.

NOTE: SOME DETAILS ARE NOT INCLUDED ON THIS DRAWING FOR MORE DETAILED SPECIFICATIONS, PLEASE INQUIRE

**PROPRIETARY**

THE INFORMATION CONTAINED ON THIS DRAWING IS PROPRIETARY. IT IS THE SOLE PROPERTY OF HERKULES EQUIPMENT CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HERKULES EQUIPMENT CORPORATION IS PROHIBITED AND MAY BE UNLAWFUL

TOLERANCES  
UNLESS OTHERWISE NOTED  
X ± .250  
XX ± .125  
XXX ± 0.030  
XXXX ± 0.0050  
ANGLE ± 1°



DESCRIPTION: LIFT SCISSOR AIR

DRN: TEP	PART NO.: LSA09-XX-87-3647
DATE: 6-3-16	CHKD BY: _____
	DWG NO.: 20116937
	REV: _____
	SHEET: 1 of 1