

Model ALTS13

ALS04 + ATS09 = ALTS13

Section 11

Travel 13"

Tilt Angle 45°



Providing a vertical travel height of 13" and a tilt angle of 45°, the ALTS13 pairs the EnKon ALS04 lift with the ATS09 tilt. The ALTS13 scissor lift and tilt table has the smallest footprint in our A-Series product line with dimensions of 20" x 41". EnKon's air scissor lift and tilt tables help to improve ergonomics in material handling applications.

Standard Features

- **100% air operated** for low maintenance, ease of use, and work environment safety
- **Low profile** accommodates a wide range of worker heights and applications
- **Modular design** is easily customizable to application specifications
- **High-strength steel, welded construction** built to safety factors required by customer application and in compliance with ANSI MH29.1-1994
- **High capacity lifting** up to 57,000 lbs (25,855 kg)
- **Variable duty cycles** from low to high for cost flexibility to fit each application
- **Self-lubricating PTFE overlay** on bearings at all pivot points for high loads and long life
- **Captured wheel guides** to prevent top and bottom lift platforms from tipping
- **Stackable lift modules** for added lift travel
- **Patented direct one-to-one lift ratio** in which the air bag supplies all of the lifting power, resulting in less stress on the scissors and increased lift longevity
- **Virtually maintenance-free** for low-cost operation and minimal downtime
- **Safety pressure release** helps prevent the air bag from overinflating
- **Enamel-based acrylic paint** applied to all surfaces after being cleaned and primed
- **Clean and green technology** for a cleaner and safer work environment

Options

- **Lockout valve and filter regulator** enhances performance of the air supply
- **Piloted internal valves with check valves** prevent undesired lift descent
- **Portability kits** allows lift system to be moved with ease
- **High speed capability** with a full cycle in under 10 seconds
- **Safety skirting** to protect from pinch points and debris

Continued ↓

Model ALTS13

ALS04 + ATS09 = ALTS13

Section 11

Travel 13"


Tilt Angle 45°



Nomenclature

Product Type: A-Series Lift Tilt Scissor
Lift Style: 13
Capacity: 30 = 3000 lbs
Raised Height: 26"
Platform Size: 20" width x 41" length

Model ALTS 13-30-26-2041

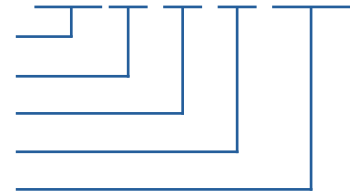

Travel in	Model	Capacity lbs	Lowered Height in	Travel in	Raised Height in	Tilt Angle °	Platform Size ⁵		Base Size ⁵ in x in	Ship Weight ¹ lbs
							Width in	Length in		
13	ALTS13-10-26-2041	1000	14	13	26	45	20 - xx	41 - xx	20 x 41	480
13	ALTS13-20-26-2041	2000	14	13	26	45	20 - xx	41 - xx	20 x 41	480
13	ALTS13-30-26-2041	3000	14	13	26	45	20 - xx	41 - xx	20 x 41	480

Values rounded to the nearest 1", see drawing for actual dimensions.

Notes

- Ship weights are estimated and do not include oversize platforms or options
- Maximum air bag pressure is 50 psi or 100 psi depending on air bag type
- Recommended air line feed pressure is 70 psi to 100 psi
- Air consumption is 5 cubic feet per minute (cfm) on average based on cycle rate
See the EnKon Systems website for how to calculate cfm for your application
URL: <http://enkon.pro/blog/calculating-cfm-and-scfm-for-pneumatic-scissor-lift-tables/>
- Width and length dimensions reference the main structure of the lift system and do not include structures such as floor tabs, bolt heads, etc. See drawing for actual dimensions
- Surface finishes are either powder coat or low-VOC quick-dry two-stage spray-on primer coat and hard enamel top coat
- Lifts must be center loaded when at full capacity
- Side and end load capacities are derated 2% per inch of increase top plate size from base size
- Safety bellow skirting option must be purchased to meet ANSI and OSHA standards

Continued ↓

Model ALTS13 Options

ALS04 + ATS09 = ALTS13

Section 11

Travel 13"

Tilt Angle 45°

Control Options

12086	Hand control valve
12347	Hand pedestal control valves for lift & tilt
13752	Foot pedal control valves for lift & tilt
13657	Regulator filter gauge with lockout / tag out (For hand controls)
16997	Regulator filter gauge with lockout / tag out (For foot controls)
13627	Regulator filter gauge (For hand controls)
16999	Regulator filter gauge (For foot controls)
13628	Lockout / tag out



EnKon.pro
With 13752



EnKon.pro
With 12347

Solid Platform Options


		Tilt
17001	Platform - 36 x 48 x 3/8 With gusset on 36" side x 12" x 3/8, offset from center	✓
13808	Platform - 48 x 48 x 3/8 With gusset on 48" side x 12" x 3/8, offset from center	✓
13809	Platform - 48 x 48 x 1/2 With gusset on 48" side x 12" x 3/8, offset from center	✓
-	Platform - Custom sizes (material: high strength hot rolled steel)	
-	Platform - Custom sizes (material: stainless steel)	



EnKon.pro
With 13808

Safety Skirting Options

1006951	Skirt - ALS04
1008084	Skirt - ATS08, 09



EnKon.pro
With 1006951
1008084

Portable Options

13822	Portable dolly handle (1000, 2000, 3000 pounds)
13825	Portable caster cart with floor lock (1000, 2000, 3000 pounds)
13826	Portable fork pockets (adds 4" to height)



EnKon.pro
With 13822



EnKon.pro
With 13826



EnKon.pro
With 13825